




**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04R 19/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 97/31506</b>
			(43) International Publication Date: 28 August 1997 (28.08.97)
(21) International Application Number: <b>PCT/FI97/00125</b>		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 26 February 1997 (26.02.97)			
(30) Priority Data: 960861 26 February 1996 (26.02.96) FI			
(71)(72) Applicant and Inventor: KIRJAVAINEN, Kari, Johannes [FI/FI]; Kivenlahdenkatu 11 A 4, FIN-02320 Espoo (FI).			
(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).			

**Published***With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.**In English translation (filed in Finnish).***(54) Title: ACOUSTIC ELEMENT AND METHOD FOR SOUND PROCESSING****(57) Abstract**

The invention relates to an acoustic element and method for sound processing. The acoustic element (1) is made of a porous stator plate (2) which is either electrically conductive or plated on at least one of its surfaces to be conductive. A moving diaphragm (3, 3a, 3b) has been attached to the stator plate (2). To measure as well as produce sound pressure and particle velocity, the equipment comprises two pairs of aforementioned acoustic elements (1). Elements serving as sensors control elements serving as actuators to attenuate and absorb sound.

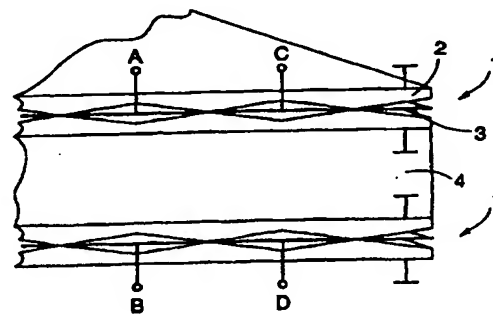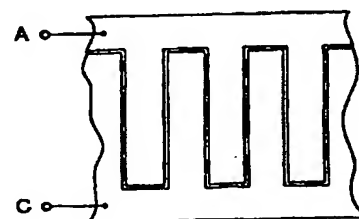**a****b****c**

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KF	Kenya	RO	Romania
BY	Belarus	K'	Kyrgyzstan	RU	Russian Federation
CA	Canada	K'	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LR	Liberia	SK	Slovakia
CM	Cameroon	LT	Lithuania	SN	Senegal
CN	China	LU	Luxembourg	SZ	Swaziland
CS	Czechoslovakia	LV	Latvia	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MD	Republic of Moldova	TJ	Tajikistan
DK	Denmark	MG	Madagascar	TT	Trinidad and Tobago
EE	Estonia	ML	Mali	UA	Ukraine
ES	Spain	MN	Mongolia	UG	Uganda
FI	Finland	MR	Mauritania	US	United States of America
FR	France			UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## ACOUSTIC ELEMENT AND METHOD FOR SOUND PROCESSING

The present invention relates to an acoustic element having a plate-like structure.

- 5           The method further relates to a method for sound processing, in which at least at least one property of a sound field is measured, and on the basis of the measurement result an attenuation sound is produced by at least one actuator.

- 10           In order to determine acoustic variables, both the sound pressure and the particle velocity must be known. These may also be used to determine acoustic impedance, which is the quotient of the sound pressure and the particle velocity. To control acoustic properties by active control methods and equipments, it must be possible to measure and adjust the aforementioned variables.

- 15           It is known to employ an electrostatic loudspeaker made of perforated plate for producing sound. The loudspeaker has a plate-like structure, but its drawbacks include a strong resonating tendency of the plate structure. In addition, electric shielding of the structure is problematic.

- 20           It is the object of the present invention to provide a simple and efficient acoustic element and method for sound processing.

The acoustic element according to the invention is characterized by comprising at least one porous stator plate which is either electrically conductive or plated on at least one side to be electrically conductive, and at least one moving diaphragm with at least one electrically conductive surface.

- 25           The method according to the invention is further characterized in that at least two dipole sensors and at least two dipole actuators, said sensors and actuators consisting of at least one porous stator plate which is either electrically conductive or plated on at least one of its sides to be electrically conductive and of at least one moving diaphragm with at least one electrically  
30           conductive surface, constitute a sandwich structure in which the sensor signals are coupled to control the moving of the dipole actuators for adjusting the sound pressure and the particle velocity to match the desired value signals.

- 35           The basic idea of the invention is that the acoustic element consists of at least one porous stator plate which is electrically conductive or plated on at least one of its surfaces to be electrically conductive, and of at least one

dielectric moving diaphragm with at least one electrically conductive surface. The idea of another embodiment is that the element consists of at least two porous stator plates and a moving dielectric diaphragm between them. The idea of yet another embodiment is that the moving diaphragm is permanently  
5 charged as an electret diaphragm. Further, the idea is that the elements according to the invention constitute a sandwich structure so that it has at least two dipole sensors and at least two dipole actuators, the sensor signals being coupled to control the moving of the actuators for adjusting the sound pressure and the particle velocity to match the desired value signals.

10 The invention provides the advantages that the element has a simple structure, problems resulting from resonating are non-existent, and its electric shielding is easy. Further, the sandwich structure contributes to efficient production, measurement and attenuation of sound.

The invention will be described in more detail in the accompanying  
15 drawings, in which

Figure 1a shows schematically a perspective view of a part of the equipment according to the invention,

Figure 1b shows a top view of a part of the equipment in Figure 1a cut open,

20 Figure 1c shows a side view of a part of the equipment in Figure 1a,

Figure 2a shows schematically a perspective view of a part of another equipment according to the invention,

Figures 2b - 2d illustrate alternative details of the equipment according to Figure 2a,

25 Figure 3 is a schematic representation for a third actuator element as a perspective view,

Figure 4 is a schematic representation for a fourth actuator element as a perspective view,

30 Figures 5 - 7 show alternatives to schematic diagrams of the method according to the invention, and

Figures 8 - 13 are schematic representations for alternative geometric shapes of the inventive element.

35 Figure 1 shows an equipment with two acoustic elements 1 on top of one another as a lamellar structure. The acoustic element 1 comprises two porous electrically conductive stator plates 2, between which has been arranged a permanently charged moving diaphragm 3. The surface against

the diaphragm 3 of the stator plate is slightly wavy, whereby small air gaps will remain between the moving diaphragm 3 connected thereto and its surface, the small air gaps enabling the movement of the diaphragm 3. As indicated by Figure 1c, the moving diaphragm 3 consists of two separate diaphragms, the upper diaphragm 3a of which has a negative charge and the lower diaphragm 3b a positive charge. Electrodes A, B, C and D have been formed between the diaphragms 3a and 3b. As shown by Figure 1b, the electrodes A, B, C and D are finger-figure electrodes, which means that the electrodes A and C, and correspondingly B and D may be positioned interleaving in the same layer.

From the electrodes A, B, C and D, either a signal corresponding to the movement of the electrode may be measured, or the movement of the diaphragm may be produced by applying a control voltage to the electrodes. The electrically conductive stator plates are grounded. Between the acoustic elements 1 there is intermediate material 4, which may be material absorbing sound passively, such as glass fiber plate, in which the glass fibers are perpendicular to the element plane.

An advantageous embodiment of the invention is represented by one where the measured signal of the electrode A is coupled, amplified with coefficient  $-P$ , to the movement-producing element D, and the movement signal measured from the electrodes B is coupled, amplified with coefficient  $P$ , to the electrode C, as illustrated by Figure 5. This produces a control corresponding both to the sound pressure and the particle velocity for producing a reverse sound field and for preventing the sound field from propagating through the element in noise attenuation embodiments.

Figure 2 illustrates an equipment having four identical acoustic dipole elements 1 connected to each other by intermediate material 4. The stator plates 2 are made of porous plastic plate whose inner surface has been metal-coated by evaporation. The metal-coated inner surface in question is grounded. The moving diaphragm 3 may be made of two plastic diaphragms 3a and 3b between which there is provided a metallized layer to which the control signal is applied, or from which the measured signal is obtained as shown by Figure 2d. The diaphragms may also have electric charges of different polarities, whereby an external bias voltage source is not required, as shown by Figure 2b. It is also possible to employ one charged diaphragm 3, whereby one of the electrodes of the stator plates 2 is grounded, and the other serves as the signal electrode, as shown by Figure 2c. Also in the embodiment

of Figure 2a, any element 1 may serve in sound measuring and sound producing capacity.

Figure 3 shows an embodiment in which four folded dipole elements 5a - 5d known per se are interconnected, and the elements are coated with a porous layer 6. In this embodiment, too, any electrode A - D may serve as a sensor or an actuator.

Figure 4 illustrates an equipment having atop a moving diaphragm 3a, whose upper surface has a metal coating 7. Below this, a stator plate 2 is found which has a metal coating 7 on both sides. The moving diaphragms 3a and 3b are in the middle with a conductive layer between them. As to their bottom parts, the electrodes of the equipment are mirror images of the upper part.

It is typical of all the above equipments illustrated in the Figures is that the sum of two signals e.g.  $A + B$  correspond to the sound pressure and the difference  $A - B$  corresponds to particle velocity. Similarly, by controlling the elements C and D in a cophasal manner it is possible to implement a monopole actuator producing sound pressure, and by controlling the elements C and D in a differential phase it is possible to implement a dipole actuator producing particle velocity. The aforementioned principle is applicable in many ways to sound reproduction equipments, active sound controlling, acoustic correction, and to embodiments of active noise attenuation.

A most advantageous control method is shown by Figure 5, implementing the principle of attenuating sound transmissivity, in which a sound pressure sensor controls the particle velocity actuator and a particle velocity sensor controls the sound pressure actuator. To implement the control principle, the signal B needs to be amplified with a coefficient P which corresponds to the control signal of the actuator C. The signal of the sensor A must be amplified with a coefficient -P to implement the aforementioned control principle. The control may also be implemented in the inverse way, with the electrode D controlling the electrode A, and the electrode C controlling the electrode B.

Figure 6 illustrates a corresponding control principle in which the frequency-dependent properties of the system may be adjusted with a variable gain amplifier  $G_1 - G_4$ . Audio signals may be applied to the system also from connectors  $A_1$  and  $A_2$ .

Figure 7 illustrates a control principle by means of which the acoustic impedance of the element may be adjusted. The difference of the sound pressure and the desired impedance  $Z \times$  particle velocity is applied to the electrode C. With very high gain of  $G_2$ , the aforementioned difference approaches zero, which fulfills  $P = Z \times U$ , i.e.  $Z = P/U$ , which is the equation for acoustic impedance. Acoustic impedance may therefore be adjusted by adjusting the coefficient  $Z_1$ . By adjusting the coefficient K, the backward radiation of the element may be adjusted to zero.

Figures 8 - 13 illustrate physical structures of the acoustic elements.

10 The structures may be planar, cylindrical, conical or even three-dimensionally arched surfaces. The elements may consist of a plurality of acoustic elements 1 with integrated control electronics 8 at their edges. Many of the accompanying drawings show the acoustic elements 1 schematically as totally flat, although they possess some dimensionality in the thickness direction.

15 Cylindrical and conical modules and combinations thereof are particularly well suited for noise attenuation of air-conditioning systems as they are capable of both absorbing noise within a duct made of modules and of attenuating sound that leaks out through the duct wall. The planar elements can both produce sound according to an audio signal and simultaneously absorb noise or adjust

20 e.g. reverberation time by adjusting acoustic impedance according to the desired value  $Z_1$ . Due to their rigidity, the modules may be used as the load-bearing structure as such. The surface layers serve as both electrical and mechanical shields, and they may be coloured or patterned as desired. The white surface may also be used as a background for a picture to be reflected.

25 The drawings and the description related thereto are only intended to illustrate the idea of the invention. The invention may vary in details within the scope of the claims. As the modules also contain components that absorb sound passively, the modules may be used for attenuating and absorbing sound in the entire sound spectrum, although the active, electronically

30 implemented portion in the system works best within the frequency range 0 - 1 kHz. Hence, it is worth while to filter frequencies higher than this off the control system. The simplest implementation of the invention may be an element having a porous metallized plate in the inner surface, with a moving diaphragm arranged in the surface of the plate. Such a sound element may also be rolled

35 up. It should be noted that porous stator plates as such attenuate high frequencies and prevent harmful acoustic reflections. Several attenuating

elements according the invention may be placed on top of each other to add to the efficiency. A wall structure with two elements positioned facing each other as a mirror image is most advantageous.



## CLAIMS

1. An acoustic element having a plate-like structure, **characterized** by comprising at least one porous stator plate (2) which is either electrically conductive or plated on at least one side to be electrically  
5 conductive, and at least one moving diaphragm (3, 3a, 3b) with at least one electrically conductive surface.
2. An acoustic element as claimed in claim 1, **characterized** in that the element comprises at least two stator plates (2), between which a moving diaphragm (3) has been arranged.
- 10 3. An acoustic element as claimed in claim 1 or 2, **characterized** in that the moving diaphragm (3, 3a, 3b) is permanently charged as an electret diaphragm.
4. An acoustic element as claimed in any one of the previous claims, **characterized** in that the moving diaphragm (3) consists of two  
15 diaphragms (3a, 3b), between which there is provided two finger-figure electrodes (A, B, C, D) in one layer.
5. An acoustic element as claimed in any one of the previous claims, **characterized** in that the control electronics (8) controlling the element is positioned at the edge of the element (1).
- 20 6. An acoustic element as claimed in any one of the previous claims, **characterized** in that there are arranged two or more elements on top of each other as a sandwich structure.
7. An acoustic element as claimed in claim 6, **characterized** in that between the elements positioned on top of each  
25 other there is provided porous intermediate material (4) that absorbs noise passively.
8. A method for sound processing, in which at least one property of a sound field is measured, and on the basis of the measurement result an attenuation sound is produced by at least one actuator,  
30 **characterized** in that at least two dipole sensors and at least two dipole actuators, said sensors and actuators consisting of at least one porous stator plate (2) which is either electrically conductive or plated on at least one of its sides to be electrically conductive and of at least one moving diaphragm (3, 3a, 3b) with at least one electrically conductive surface, constitute a sandwich  
35 structure in which the sensor signals are coupled to control the moving of the

dipole actuators for adjusting the sound pressure and the particle velocity to match the desired value signals.

9. A method as claimed in claim 8, **characterized** in that the first electrode (A) serving as a sensor controls the second electrode (D) serving as an actuator, multiplied by a coefficient  $-P$ , and the third electrode (B) serving as a sensor controls the fourth electrode (C) serving as an actuator, multiplied by a coefficient  $P$ .

10. A method as claimed in claim 8 or 9, **characterized** in that a signal corresponding to the sound pressure is formed from the sum of the sensor signals, and that a signal corresponding to the particle velocity is formed from the difference of the signals to adjust the movements of the actuators.

11. A method as claimed in claim 8 or 10, **characterized** by forming a product of the particle velocity signal and the impedance control coefficient  $Z_1$ , subtracting the sound pressure signal from it, amplifying the difference by a gain coefficient ( $G_2$ ), and inputting this signal to control the movements of the actuators.

12. A method as claimed in any one of the previous claims, **characterized** in that between the acoustic elements (1) sound is attenuated by means of porous intermediate material (4) that absorbs sound passively.

1/6

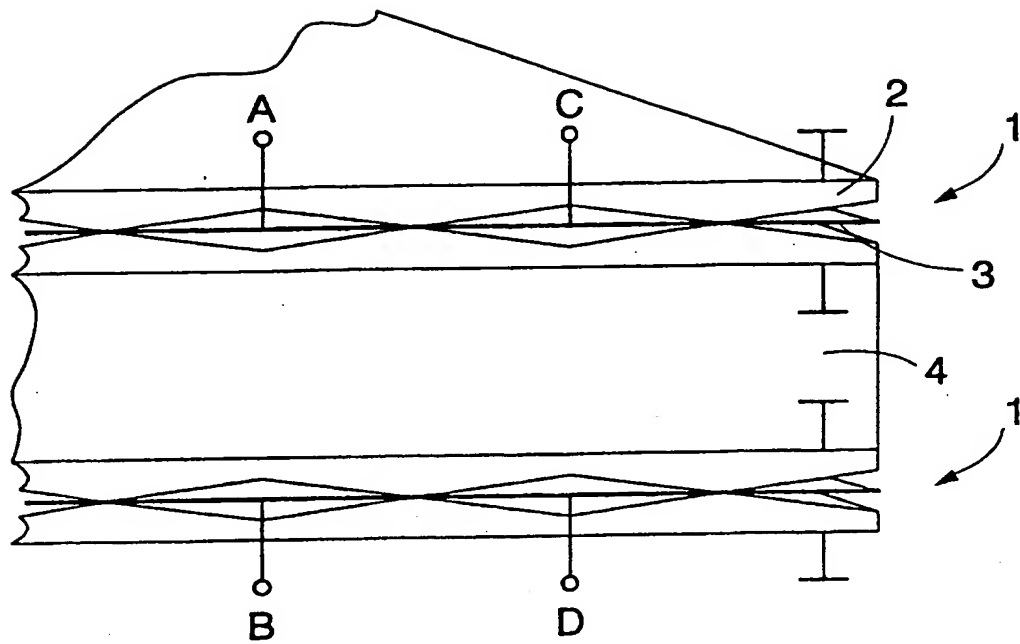


FIG. 1a

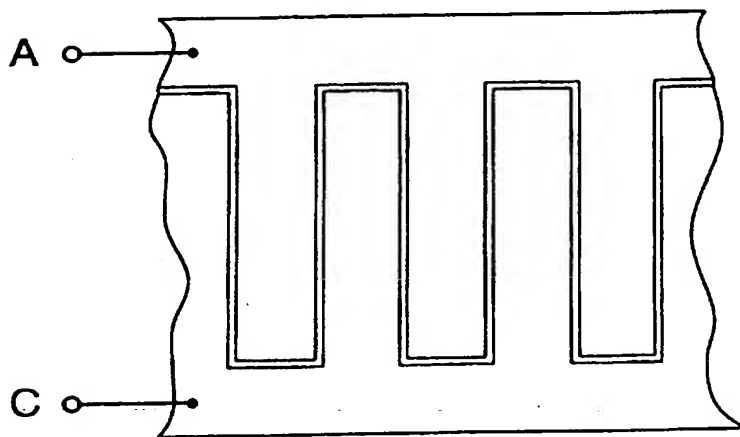


FIG. 1b

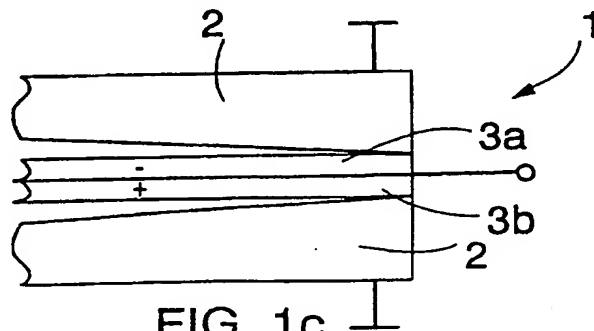


FIG. 1c

2/6

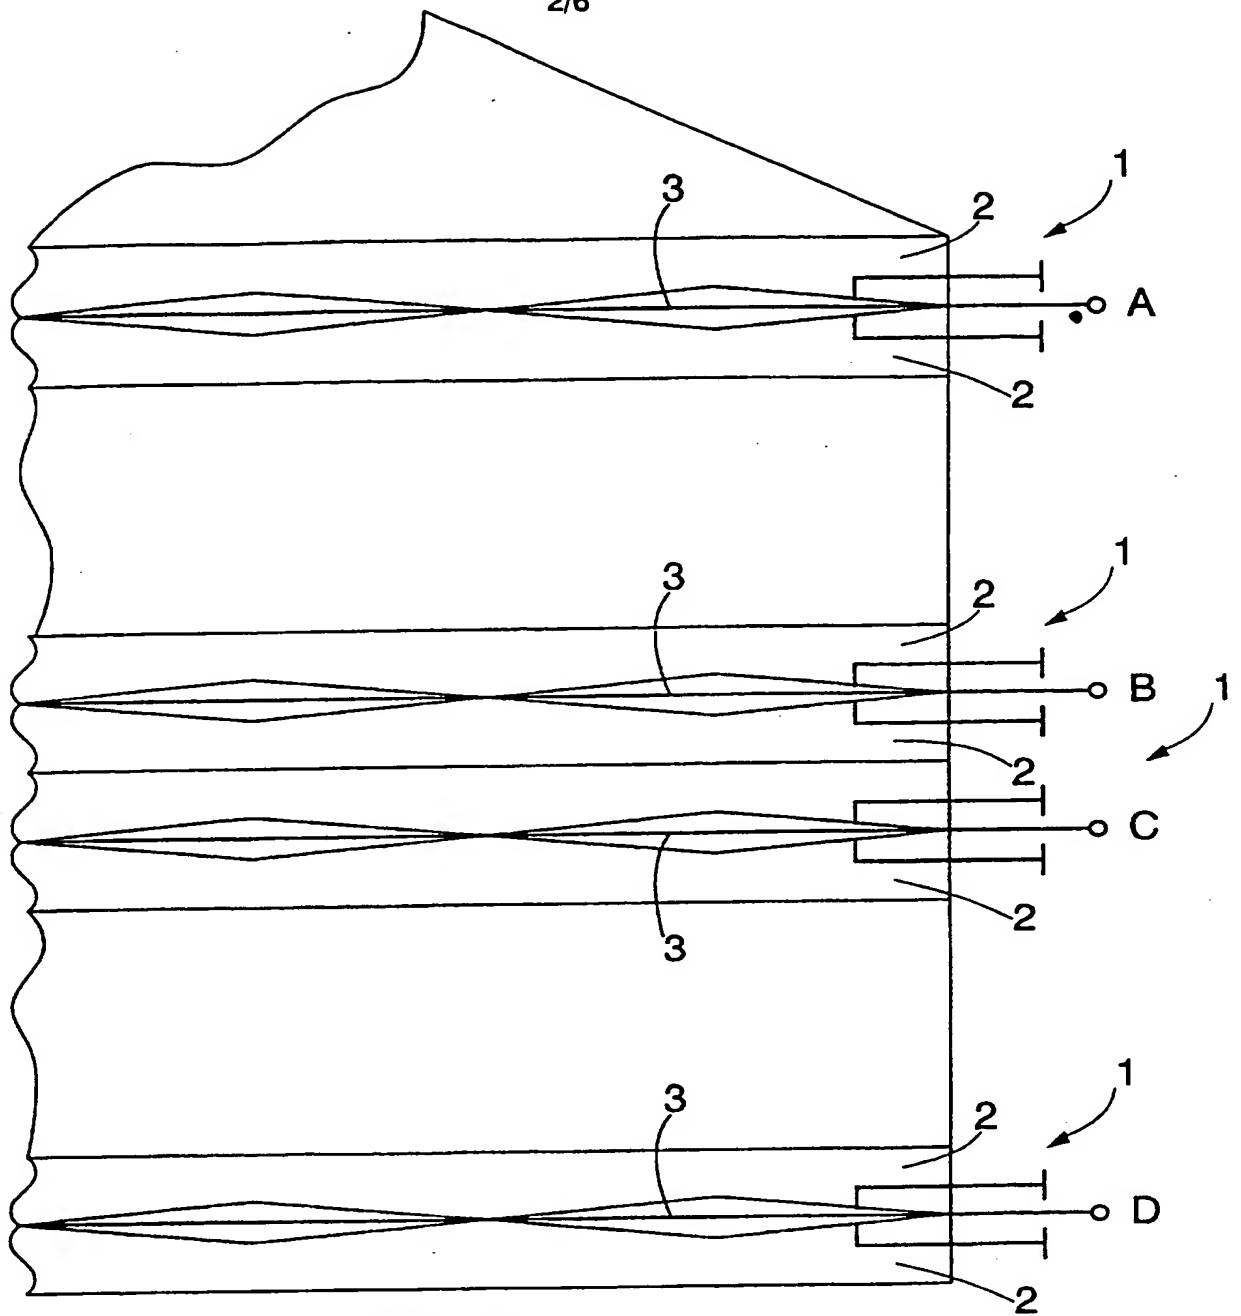


FIG. 2a

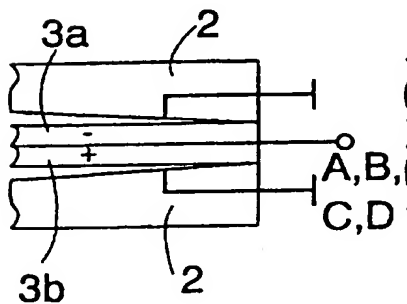


FIG. 2b

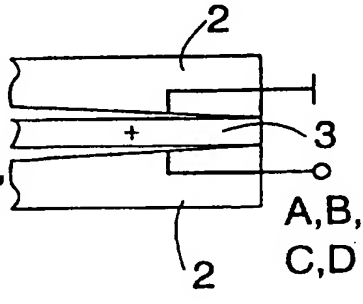


FIG. 2c



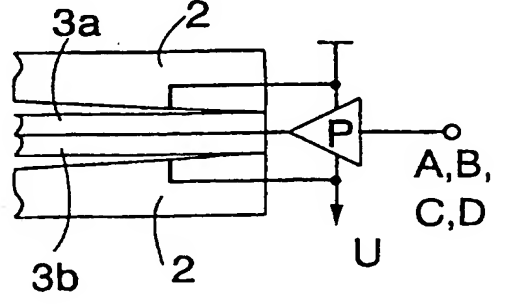


FIG. 2d

3/6

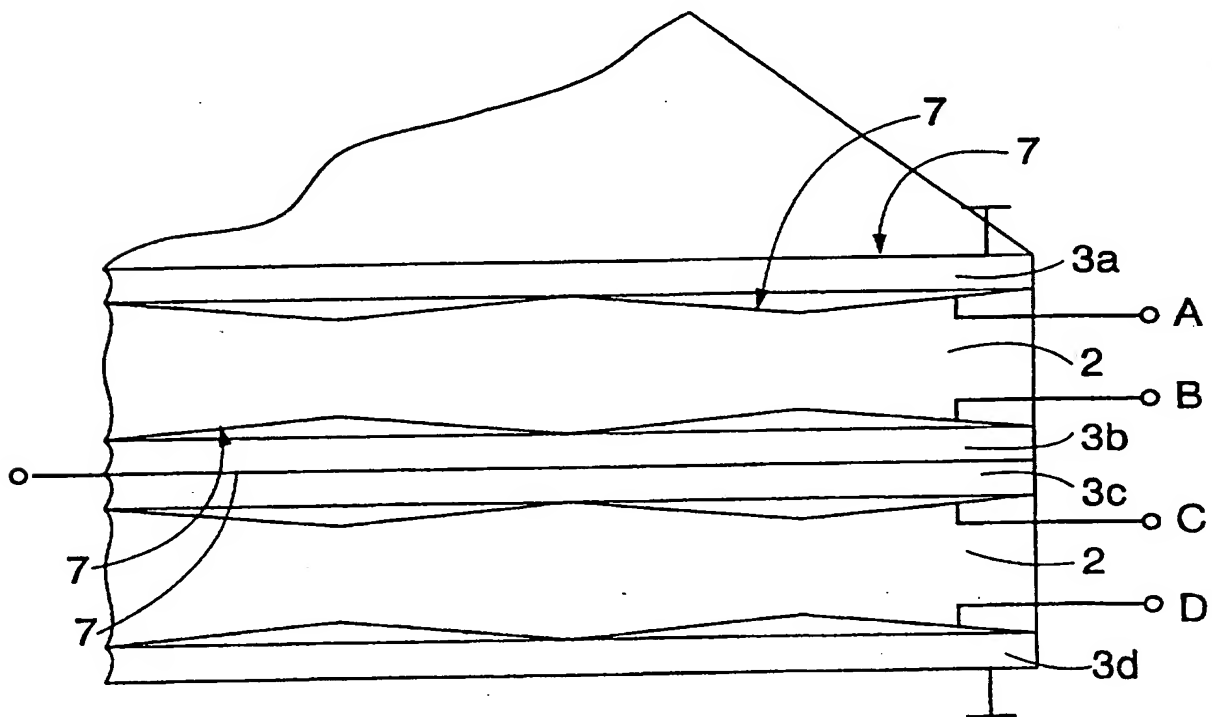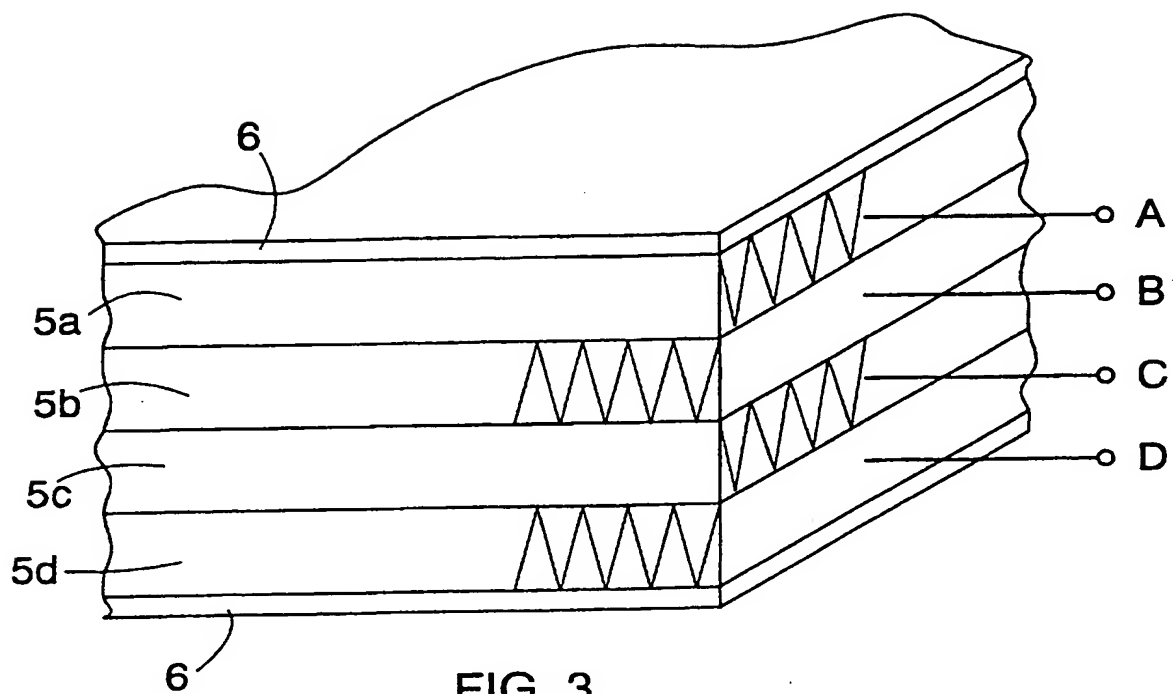

4/6

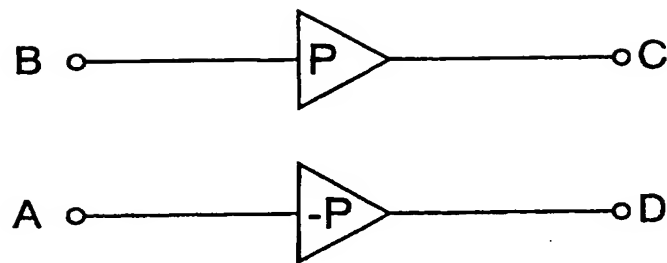


FIG. 5

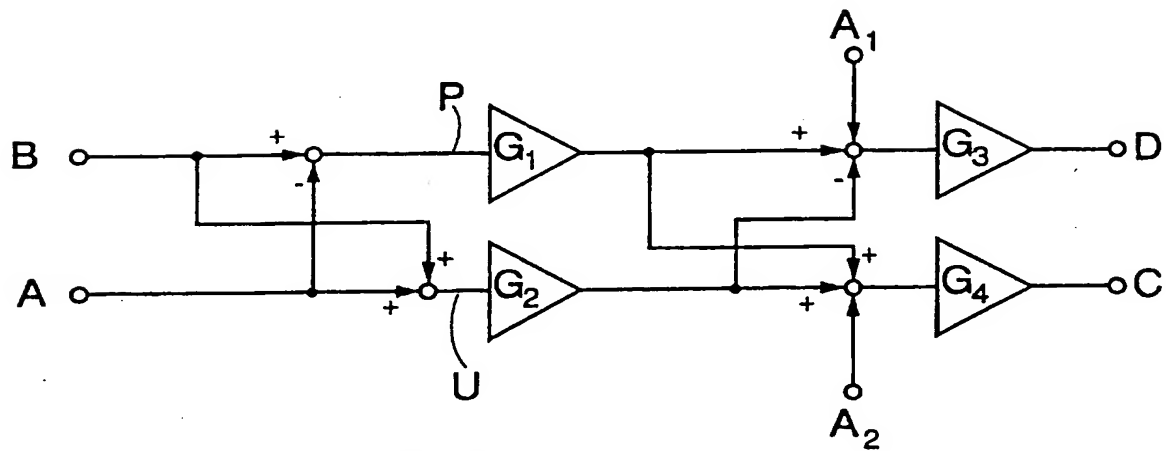


FIG. 6

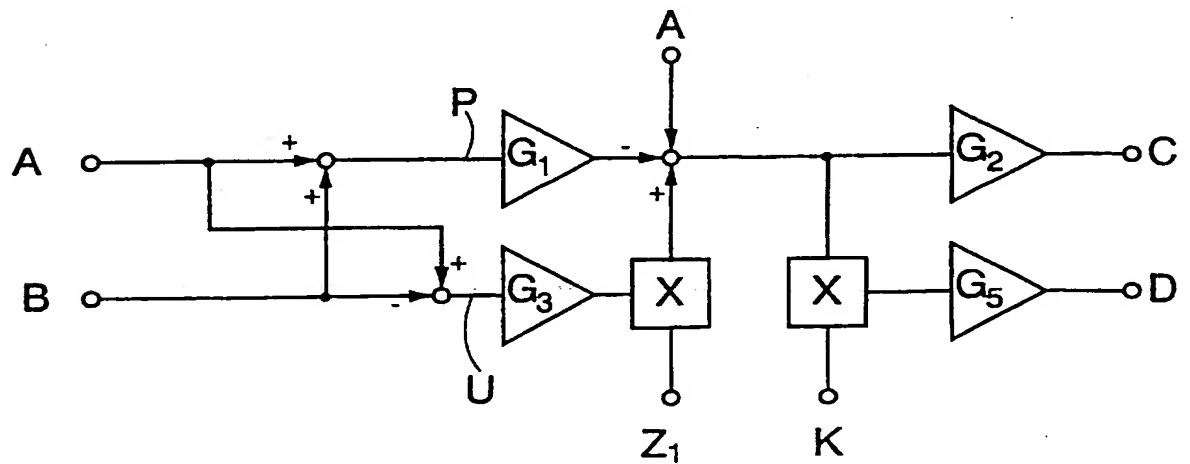


FIG. 7

5/6

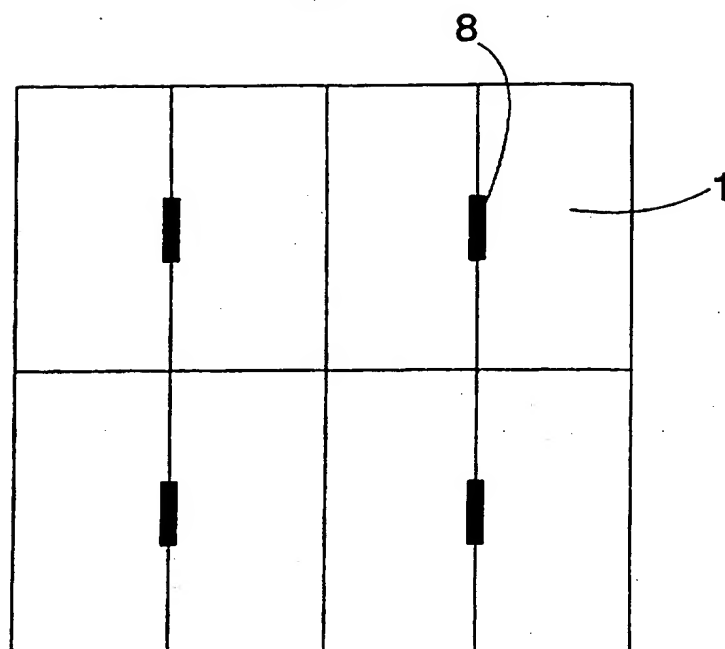


FIG. 8

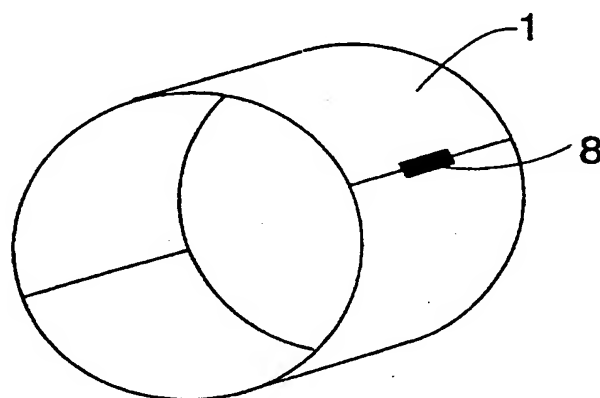


FIG. 9

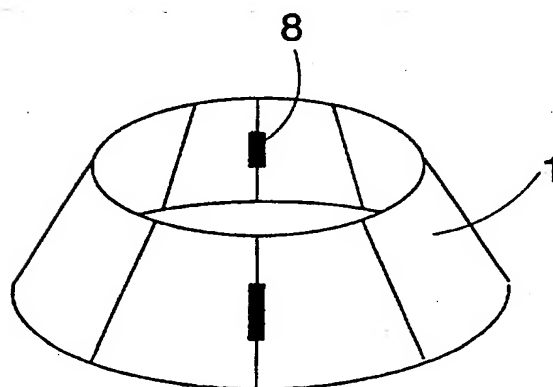


FIG. 10

6/6

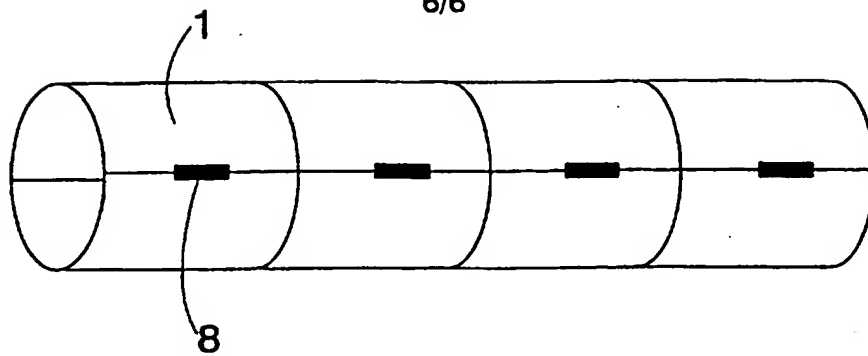


FIG. 11

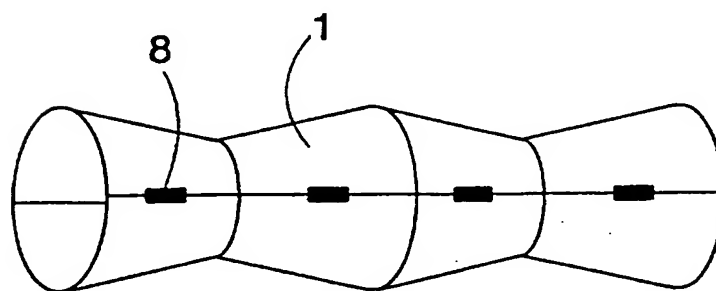


FIG. 12

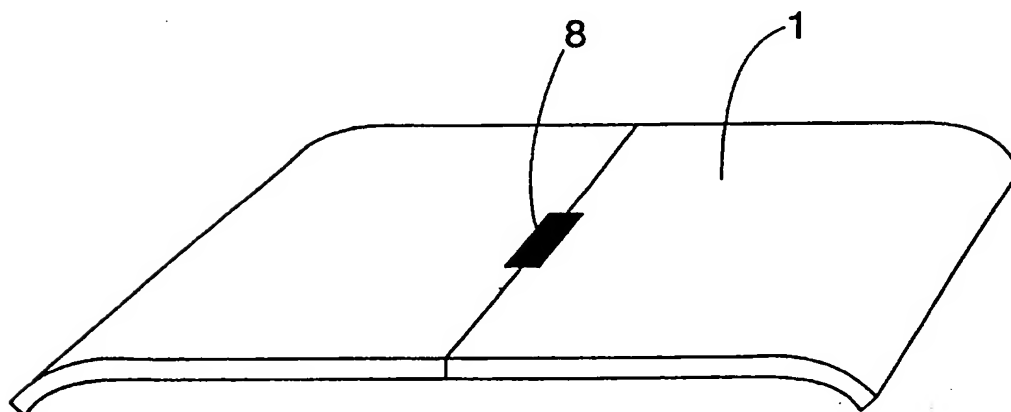


FIG. 13



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00125

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04R 19/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0084608 A1 (SAVOD SA ELEKTRONNI PREOBRASUVATELNI ELEMENTI), 3 August 1983 (03.08.83) --	1-12
A	DE 2444023 A1 (BOWERS AND WILKINS ELECTRONICS LTD.), 20 March 1975 (20.03.75) -- -----	1-12

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 June 1997

Date of mailing of the international search report

26 -06- 1997

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Kati Öhman  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

03/06/97

International application No.

PCT/FI 97/00125

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0084608	A1	03/08/83	SE	0084608 T3	
				BG	34753 A	15/11/83
				CA	1200888 A	18/02/86
				JP	58131900 A	05/08/83
-----						
DE	2444023	A1	20/03/75	BE	819975 A	16/01/75
				FR	2246150 A,B	25/04/75
				JP	50089017 A	17/07/75
				NL	7412195 A	18/03/75
				SE	7411457 A	17/03/75
-----						